


## ALPHA VACULOY® A WAVESOLDER METAL

- Good wetting, high fluidity
- Reduced product usage
- Low fillets
- Bright joints, easy inspection

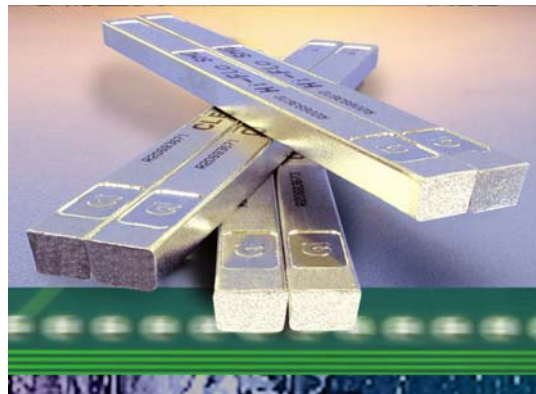

### DESCRIPTION

VACULOY® is manufactured using high purity raw materials and the alloy is conditioned using Alpha's VACULOY® viscosity and dross lowering treatment. This results in a pure low dross high fluidity solder alloy, which is free of cast in impurities and included oxides.

### FEATURES & BENEFITS

*VACULOY® treated prior to casting:* this removes finely divided suspended oxides that are found in all virgin raw materials, this increases the fluidity and hence soldering defects.

- The removal of the finely divided oxide reduces drossing rate, the wave stays cleaner, longer.
- Has a proven track record, no need to take chances.

### APPLICATION

VACULOY® is the ideal companion product for all wave soldering systems. VACULOY® is ideal for the following types of applications:

- High volume wave soldering processes
- Applications requiring dual wave and chip wave systems
- Boards that are densely populated

A solder pot temperature of 240 - 250° is recommended. For suitable wave solder fluxes, please see our selector guide. Reclaim services including dedicated containers are also available, please consult your local sales office.

### AVAILABILITY

VACULOY® is available in 3.5kg feeder bars, 1kg bars and solder chunks for first fill of solder baths.

VACULOY® is available in the following standard alloy: 63Sn/37Pb and 60Sn/40Pb.

### HEALTH & SAFETY

Please refer to MSDS for advice on proper handling and safety instructions.

The information contained herein is based on data considered accurate and is offered at no charge. No warranty is expressed or implied regarding the accuracy of this data. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated.





**TECHNICAL SPECIFICATION**

The following indicates the Alloy and impurity limits for VACULOY® in relation to J-STD-006A,

ELEMENT	VACULOY® A	J-STD-006A Sn63Pb37A
Sn	*62.5-63.5	62.5-63.5
Pb	Balance	Balance
Sb	0.50 max	0.50 max
Cu	0.08 max	0.08 max
Zn	0.003 max	0.003 max
Fe	0.01 max	0.02 max
As	0.03 max	0.03 max
Ni	0.01 max	0.01 max
Bi	0.10 max	0.10 max
Cd	0.002 max	0.002 max
Ag	0.10 max	0.10 max
Al	0.005 max	0.005 max
In	0.10 max	0.10 max

All figures are %

Conforms	J-STD-006A Sn63Pb37A
----------	-------------------------

1. J-STD-006A: May 2001

Requirements for Electronic Grade Solder alloys and non-fluxed solders. Joint Industry Standard between IPC and Electronic Industries Alliance (US Based). IPC formed in 1957 as an Institute of Printed Circuits, J-STD-006A supercedes IPC-SF-818.

\* For 60Sn/40Pb 59.5-60.5 Sn



**Headquarters**  
Cookson Electronics Assembly Materials  
600 Route 440  
Jersey City  
NJ 07304, U.S.A.  
Tel: +1 (201) 434 6778  
Fax: +1 (201) 434 7508  
www.alphametals.com

**Regional Sales Offices:**

Belgium Tel: +32 (0) 14 44 50 00  
Brazil Tel: +55 11 4353 2500  
France Tel: +33 (0) 2 41 49 00 11  
Germany Tel: +49 (0) 203 55540  
Hong Kong Tel: +852 3190 3100  
Hungary Tel: +36 (0) 24 460 72 0  
India Tel: +91 44 625 2666  
Ireland Tel: +353 (0) 1 842 1172  
Italy Tel: +39 (0)2 38 33 11

Japan Tel: +81 463 53 3333  
Korea Tel: +82 31 499 1451  
Mexico Tel: +52 3 818 9500  
Netherlands Tel: +31 (0) 35 695 5411  
Singapore Tel: +65 6861 1977  
Taiwan Tel: +886 (3) 322 2721  
UK Tel: +44 (0) 1483 793100  
USA - Elgin Tel: +1 (847) 697 1735

The information contained herein is based on data considered accurate and is offered at no charge. No warranty is expressed or implied regarding the accuracy of this data. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated.